

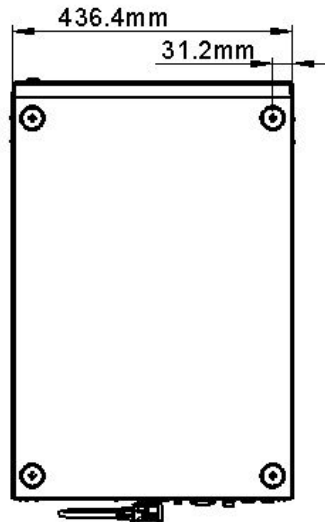
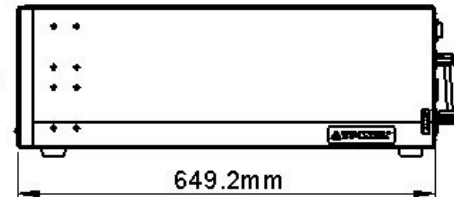


A600 Controller

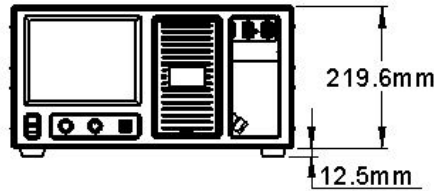

Product Description

- Eight-inch touch screen with on board computer and powerful human-machine interface
- Real-time monitoring and control of RF power and gas flow rates
- Real-time graphical output of process parameters
- Connect via Ethernet or RS232 to external controllers

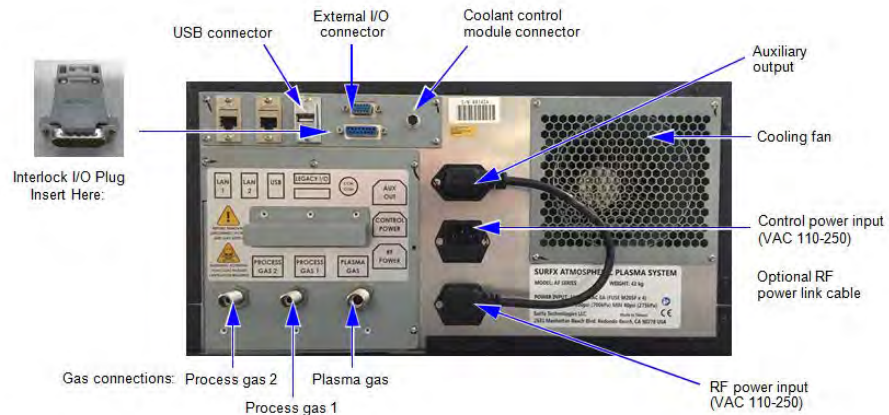

Technical Specifications

Item	Specifications
Dimensions (W x D x H)	436.4 x 649.2 x 232.1 mm ³ (17.2 x 25.6 x 9.2 in ³)
Weight	29 kg (64 lbs)
Electrical Supply	110-240 VAC, 50 – 60 Hz, 1500 W
Maximum RF Power	600 W
Operating Pressure Range	40 - 100 psig
Primary Gas	Argon or Helium
Process Gases	O ₂ , N ₂ or H ₂

North America – Headquarters

2631 Manhattan Beach Blvd
Redondo Beach, CA 90278
Ph: +1 (310) 558-0770
sales@surfxtechnologies.com

Europe

Ph: +49 813 4557 0012 (Germany)
alex.wanninger@novel-tec.de

Asia Pacific Region

Ph: +886 4 2263 8200 (Taiwan)
sales_asia@surfxtechnologies.com